

Berridge Straight or Curved High Seam Tee-Panel System



Metal Standing Seam Roof Systems

With exclusive patented Vinyl Weather Seal as integral part of Snap-On Seam*. Prefinished or bare metal for residential or commercial construction with solid sheathing

- Hidden Fasteners
- Extruded Vinyl Weatherseal as integral part of Snap-OnSeam to prevent siphoning or flooding over seam
- Eave to ridge lengths
- Narrow High Seam
- U.L. 90 & U.L. Fire Resistance Listed
- ASTM air & water resistance tested
- ASTM E-1592 tested



(Shown with Striations which are standard)

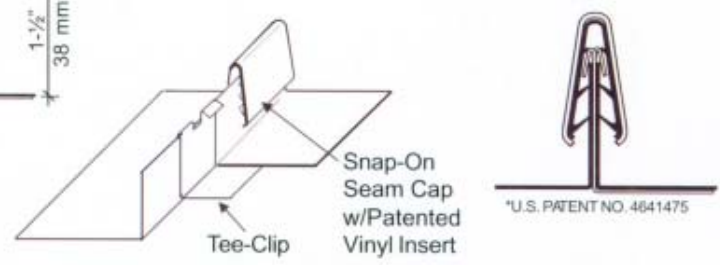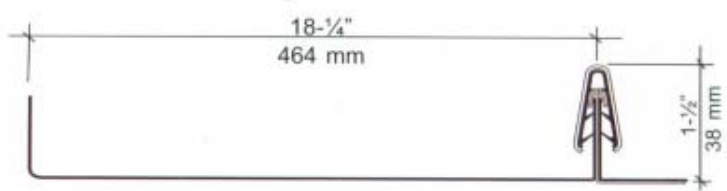

BOTH STRAIGHT AND CURVED HIGH SEAM TEE-PANELS MAY BE FORMED ON SITE WITH THE MODEL SS-1421 PORTABLE ROLL FORMER



For specific job application recommendations, please contact Berridge Technical Department - 1-800-231-8127

SPECIFICATIONS

(Request complete specifications from factory)

Furnish and install Berridge High Seam Tee-Panel Standing Seam System as manufactured by Berridge Manufacturing Co., Houston, Texas.

MANUFACTURE:

Panels shall be roll-formed in continuous lengths from coil with the Berridge SS-1421 Portable Roll-Former. Seam height shall be 1 1/2" and seam spacing shall be 18-1/4" on-center. Snap-on seams shall contain an extruded vinyl weather seal insert. Certification shall be submitted, based on independent testing laboratory, indicating no measurable water penetration through the standing seam system when tested in accordance with ASTM E331-86. Where required, panel assembly shall be Underwriter's Laboratory UL90, pursuant to Construction Number 296 & 475. When curved, entire roof area shall be covered with a minimum of one layer of Ice & Water Shield.

MATERIAL AND FINISH

(See "Specifications" on web site: www.berridge.com)

CONSTRUCTION DETAILS

(See web site: www.berridge.com)