
Berridge B-6 Panel

WALL, SOFFIT, CEILING AND FASCIA PANEL SYSTEM

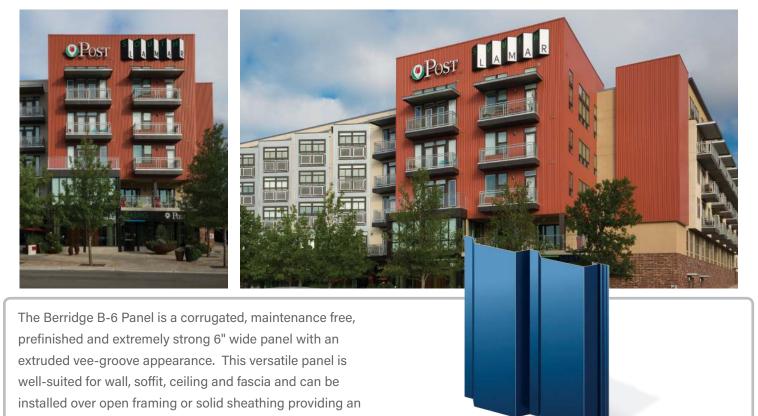

extruded vee-groove pattern.

Materials

24 Gauge Steel

Specifications


Uses: Wall, Soffit, Ceiling, Fascia, Screen Wall, Berridge Fencing System Coverage: 6" Finishes: Smooth Fasteners: Concealed Applications: Vertical over open framing or solid sheathing Pattern: Extruded vee-groove

Installation

- Panel is available from the factory in continuous lengths to a maximum of 40'
- Panel may be used on curved walls but the panel itself does not curve.

Pictured Right

Interior Installation Example





Pictured Above Project: Post S. Lamar Architect: LRK Architects General Contractor: Rampart Construction Installing Contractor: Greater Dallas Roofing, LLC Color: Terra-Cotta

> All information subject to change without notice. See website for details, specifications and Watertightness Warranty requirements. © Berridge Manufacturing Company 2018 • 800-669-0009 • www.berridge.com

BERRIDGE B-6 PANEL TESTING AND CERTIFICATION SUMMARY CHART

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
PERFORMANCE	Uplift Resistance	ASTM E-330	Test method to determine structural performance under uniform static air pressure	-176.5 PSF / +205.15 PSF allowable to 24 GA supports at 36" on center

■ - Steel only □ - Steel and Aluminum For further details please visit www.berridge.com



CORPORATE HEADQUARTERS

2610 Harry Wurzbach Road San Antonio, TX 78209 (800) 669-0009 www.Berridge.com