


Berridge Bermuda Panel

ALTERNATIVE SYSTEM



The Berridge Bermuda Panel has the traditional Bermuda look with the strength of steel. The strong horizontal lines create a smooth, stepped appearance and provide a great way to achieve a classic look.

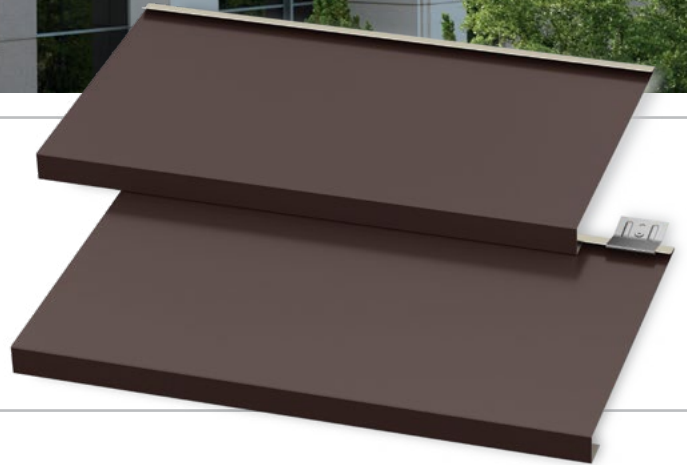

Materials

24 Gauge Steel

Specifications

Uses: Roof, Fascia, Mansard

Coverage: 11"

Finishes: Smooth, optional woodgrain texture

Fasteners: Concealed


Applications: Solid sheathing

Panel Offset: 1" seam

Optional: Vinyl weatherseal

Installation

- Panel is available from the factory in continuous lengths to a maximum of 30'.
- May be site formed in continuous lengths with the Berridge BP-14 Roll Former.
- Use Bermuda roof splice plate for panel expansion and contraction. Leave gap between panel. Required for panels over 30'.
- Use Bermuda Panel vinyl weatherseal for additional watertightness.
- Use anchor clip, typically at 24" O.C., install along panel interlock.
- Estimate 76 clips per square.

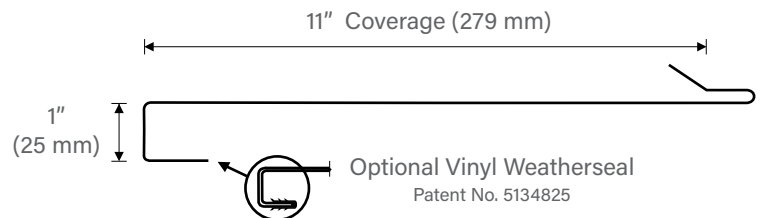

- Use standard channel at end walls and flashed area*.
- Use special channel at gable ends and areas where color will show on all sides*.
- Use starter strip at eaves for first row of Bermuda Panels to lock into. Do not lap joints. Use with eave drip flashing.

Note:

* Trim drawings with dimensions and finish side required for all Berridge manufactured trim pieces

Pictured Above

Project: San Clemente Office Park - Austin, TX

Architect: Boka Powell

General Contractor: Zapalac/Reed

Installing Contractor: Texas Fifth Wall

Color: Champagne

All information subject to change without notice. See website for details, specifications and Watertightness Warranty requirements.

© Berridge Manufacturing Company 2024 • (800) 669-0009 • www.Berridge.com

BERRIDGE BERMUDA PANEL TESTING AND CERTIFICATION SUMMARY CHART

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
FIRE	■ Room Fire Performance	UL 790	Test methods for fire tests of roof coverings	Class A Rating
ENVIRONMENTAL	■ Impact Resistance	UL 2218	Impact resistance of prepared roof coverings	Class 4 Rating
PRODUCT LISTINGS	■ Florida Product Approval	TAS 125	Local and state approval of products and systems for compliance with the structural requirements of the Florida Building Code	FL #11422.1 (24 GA - Plywood, Wood Plank)
	■ Underwriters Laboratories	UL 580 Uplift Class 90	Standard for Tests for Uplift Resistance of Roof Assemblies	Construction No. 405 (24 GA - Plywood)

■ - Steel only □ - Steel and Aluminum
 For further details please visit www.berridge.com



CORPORATE HEADQUARTERS
 2610 Harry Wurzbach Road
 San Antonio, TX 78209
 (800) 669-0009
www.Berridge.com