

## COIL & COVERAGE

Coil Size: 20-7/8" (Nominal 21")

Coil Quantity: 127.27 SF per SQ of coverage

## SYSTEM ACCESSORIES (Factory Formed)


Cee-Clips: 45 clips/SQ (typically at 36" o.c.)

Continuous Cee-Rib: 72.73LF per SQ of coverage

Vinyl Weatherseal: 72.73LF per SQ of coverage

## PANEL OPTIONS

Smooth (Standard) or Striated Panel (shown below)

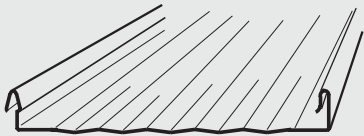

## SALE & LEASING INFORMATION

Sale Price: Consult BMC

Non-Licensee Lease: Consult BMC

Licensee Lease: Consult BMC

Long Term Lease: Consult BMC


## SPECIFICATIONS

Mounted on heavy duty 4-wheel table

Width: 34" Length: 146" Height: 60"

Weight: 3080 lbs with shipping cover

1. 2 HP electric motor - 220V single-phase current
2. High Speed - 45' per minute
3. Built-in uncoiler (up to 2000 lb coil)
4. Stainless steel heat-treated, hardened rollers
5. Unique side production for ease of operation
6. Mechanical splitter shear
7. Accurate-length gauge (computer optional)
8. Continuous-length panels, based on coil size
9. All sealed bearings
10. Coil handling apparatus included
11. Sliding panel support wheel
12. Machine inserts vinyl weatherseal (optional)

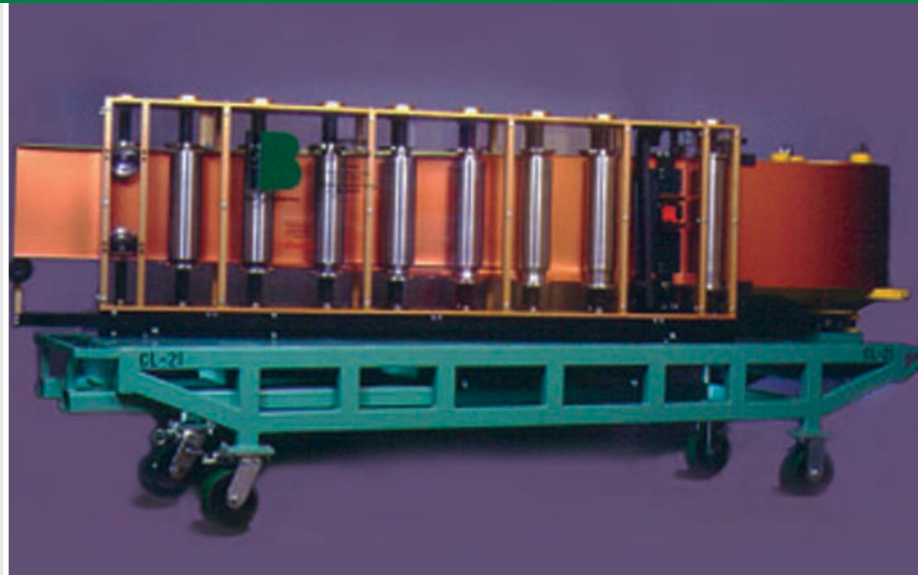

The Berridge Model CL-21 Portable Roll-Former forms continuous-length, eave-to-ridge straight Berridge Cee-Lock Panels. Berridge Cee-Lock panels have an integrated snap-lock seam with an optional patented vinyl weatherseal that can be applied into the female leg during the roll forming process. Cee-Lock panels are available smooth or with striations designed to minimize the appearance of waviness, or "oil-canning". Use individual factory formed Cee-Clips or Continuous Cee-Ribs over solid sheathing. Refer to [www.berridge.com](http://www.berridge.com) for ASTM & UL Ratings.

