


Berridge Victorian & Classic Shingles

SHINGLE SYSTEM



The Berridge Victorian and Classic Shingles create a traditional design look. This versatile product can be used in residential or commercial applications over solid wood sheathing on both roofs and walls making it ideal for restoration projects or new construction requiring a historic Victorian or classical traditional feel.

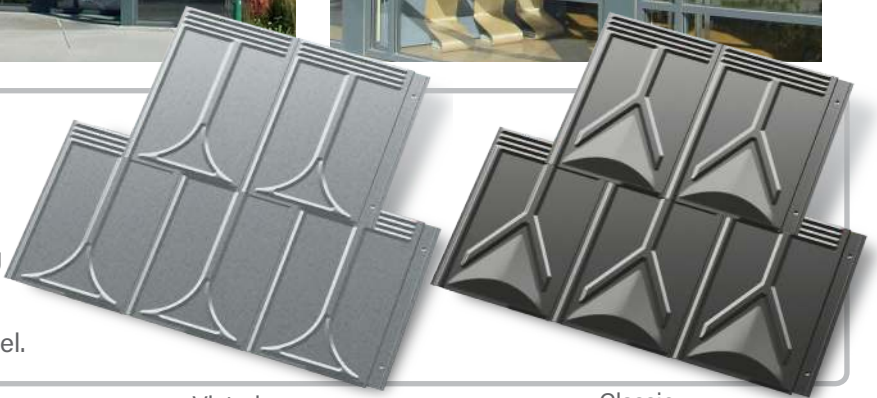

Materials

24 Gauge Steel

Specifications

Uses: Roof, Wall, Fascia

Finishes: Victorian or Classic embossed pattern

Fasteners: Concealed


Applications: Solid sheathing

Coverage: 9" wide and 12" tall

Installation

- Factory formed prefinished tiles
- 133 Shingles per square, must order in full square quantities, minimum order of one square
- Use J-Clip continuously at ridge, hip, gables, endwalls, valleys, etc.*
- Use 4" ridge/hip cap continuously at ridges and hips*
- Use drip flashing continuously at eaves and gables*

* Trim drawings with dimensions, specified angle or roof pitch, and finish side required for all Berridge manufactured trim pieces

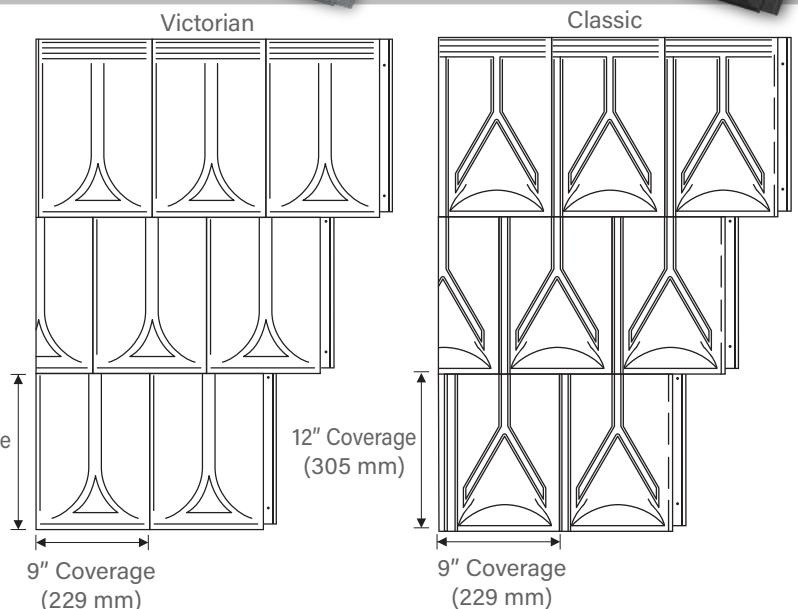

Pictured Above
Panel: Classic
Project: Sinclair Hille Studio
Architect: Sinclair Hille
General Contractor and Installer:
Brester Construction
Color: Zinc Grey

Pictured Right
Panel: Victorian



All information subject to change without notice. See website for details, specifications and Watertightness Warranty requirements.

© Berridge Manufacturing Company 2018 • 800-669-0009 • www.berridge.com

BERRIDGE VICTORIAN & CLASSIC SHINGLES TESTING AND CERTIFICATION SUMMARY CHART

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
PERFORMANCE	■ Underwriters Laboratories	UL 580/UL 1897	Test method to determine uplift resistance of roof assemblies	See Load Chart on Berridge website
ROOF LISTINGS	■ Florida Product Approval	TAS 125	Local and state approval of products and systems for compliance with the structural requirements of the Florida Building Code	FL# 11422.2 (24 GA-Wood Deck) FL# 11241.3 (24 GA-Plywood)
	■ Miami Dade	TAS 125	Miami Dade County approval of building products directly related to the structural wind resistance	NOA # 17-0808.05
	■ TDI Listed	UL 580	Texas Department of Insurance Listing for wind capacities	RC-231 (24 GA-Plywood)

■ - Steel only □ - Steel and Aluminum
 For further details please visit www.berridge.com



CORPORATE HEADQUARTERS
 2610 Harry Wurzbach Road
 San Antonio, TX 78209
 (800) 669-0009
www.Berridge.com