


Berridge Double-Lock Zee-Lock Panel Load Chart

OSB

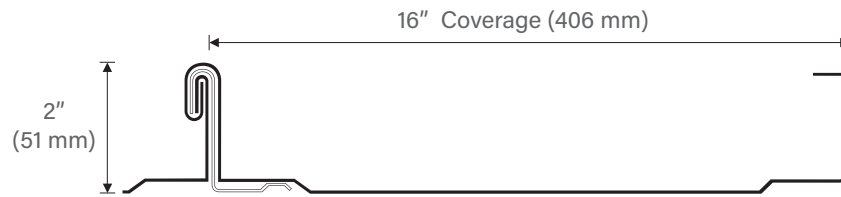

7/16" OSB (Galvalume Substrate)						
Gauge of Panel	Spacing (in)	Clip Type	Fastener	Fastener Quantity	Allowable (psf)	Ultimate (psf)
24	8	Continuous Rib	#14-10 HWH Type A	1	146	292
24	10	Continuous Rib	#14-10 HWH Type A	1	126	252
24	12	Continuous Rib	#14-10 HWH Type A	1	106	212
24	14	Continuous Rib	#14-10 HWH Type A	1	86	172

NOTES:

1) All test results determined through UL580/ UL1897 testing standards.



CORPORATE HEADQUARTERS

2610 Harry Wurzbach Road
 San Antonio, TX 78209
 (800) 669-0009
 www.Berridge.com