


Berridge 2-Piece Floating Zee-Lock Clip

FOR USE WITH DOUBLE-LOCK ZEE-LOCK PANEL

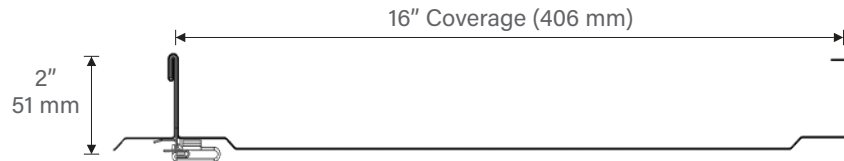

Materials

22 Gauge Steel Top with 16 GA Galvanized Base

22 Gauge Stainless Steel Top with 16 GA Galvanized Base**


Installation

- Install per Berridge Installation Details
- Attachment: Use (2) #14-10 Hex head self-tapping fastener per clip (for plywood substrate), (2) #14-13 Self-drilling fasteners per clip (for Steel Deck), or (2) ¼-14 HWH Self-drilling fasteners per clip (for Steel Supports)
- Spacing: 24" O.C. max into ½" plywood (for aluminum or galvalume panel), 24" O.C. max into 22 gauge Steel Deck (for aluminum or galvalume panel), or 24" O.C. in 16 gauge Steel Supports (for galvalume panel)*
- Use (2) clips at eave

Note:

*If specifications, local codes, or other regulations dictate specific wind uplift requirements, consult Berridge's Engineering Department at (800) 669-0009. It may be necessary to use a different clip, clip spacing, fastener, fastener spacing, or assembly.

** Use Stainless Steel clips with Aluminum Substrate

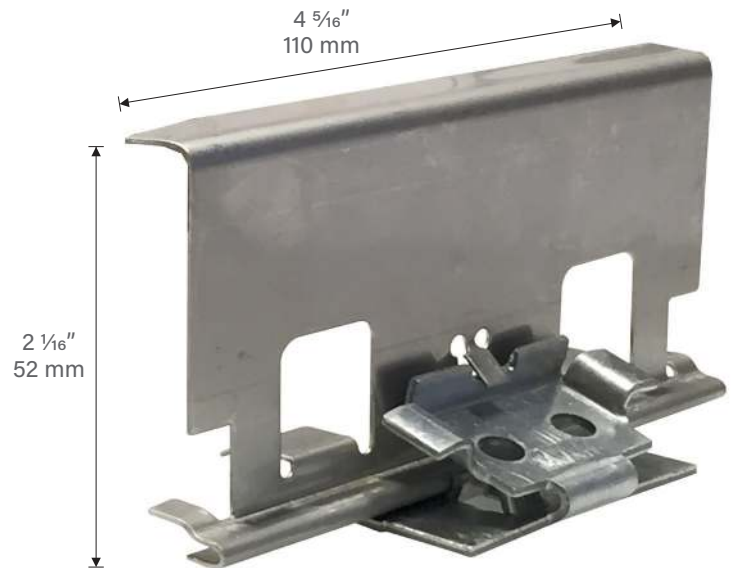

CORPORATE HEADQUARTERS

2610 Harry Wurzbach Road

San Antonio, TX 78209

(800) 669-0009

www.Berridge.com

All information subject to change without notice. See website for details, specifications and Watertightness Warranty requirements.

© Berridge Manufacturing Company 2019 • 800-669-0009 • www.berridge.com