


Berridge Fluted Fascia

SPECIALTY APPLICATION SYSTEM



The Berridge Fluted Fascia interlocking panels provide a fluted texture for large expansive walls, fascia or steep mansards. The interlocking feature increases wind resistance and allows for multiple application uses. The large fluted, interlocking panels run 34 1/2" long and 10" tall with a 3/8" depth.

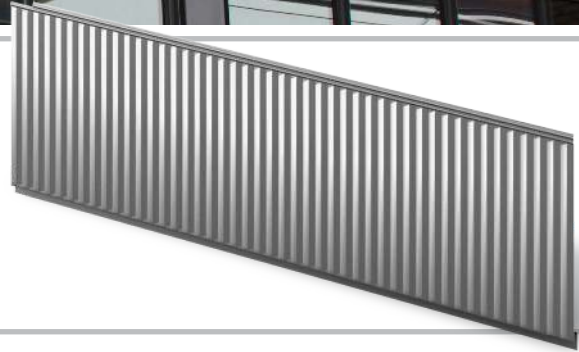

Materials

24 Gauge Steel

Specifications


Uses: Walls, Fascia, Steep Mansards

Coverage: 34 1/2" X 10"

Finishes: Fluted

Fasteners: Concealed

Applications: Horizontal over solid wood sheathing

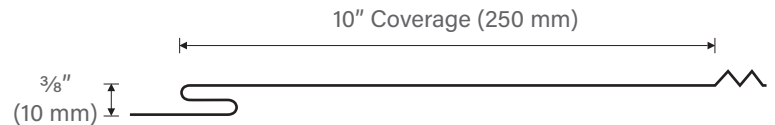

Installation

- Panel is available from the factory in full square quantities of 42 panels per square. Panel must be ordered in full square quantities
- Interlocking Panel
- Install horizontally from the top left of wall working down and right
- Mansards must be 45° or more



Pictured Above and Right
Project: Scottsdale Crossing
Architect: Nelsen Partners
General Contractor: Whiting Turner
Installing Contractor: Total Metals
Color: Zinc-Cote™

All information subject to change without notice. See website for details, specifications and Watertightness Warranty requirements.

© Berridge Manufacturing Company 2018 • 800-669-0009 • www.berridge.com

BERRIDGE FLUTED FASCIA TESTING AND CERTIFICATION SUMMARY CHART

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
PERFORMANCE	■ Uplift Resistance	ASTM E-330	Test method to determine structural performance under uniform static air pressure	-55 PSF / +75 PSF allowable to minimum 15/32" plywood using 3 screws per panel
ROOF LISTINGS	■ Florida Product Approval	ASTM E-330	Local and state approval of products and systems for compliance with the structural requirements of the Florida Building Code	FL# 11462.1 (Plywood)

■ - Steel only □ - Steel and Aluminum
 For further details please visit www.berridge.com



CORPORATE HEADQUARTERS
 2610 Harry Wurzbach Road
 San Antonio, TX 78209
 (800) 669-0009
www.Berridge.com