




The Berridge Model FP-16 Portable Roll-Former makes the Berridge L- Panel. This panel may be used for fascia, soffit and ceilings. The L-Panel standard configuration is with 2 grooves but is also available smooth with no grooves. Two rows of venting are optional.

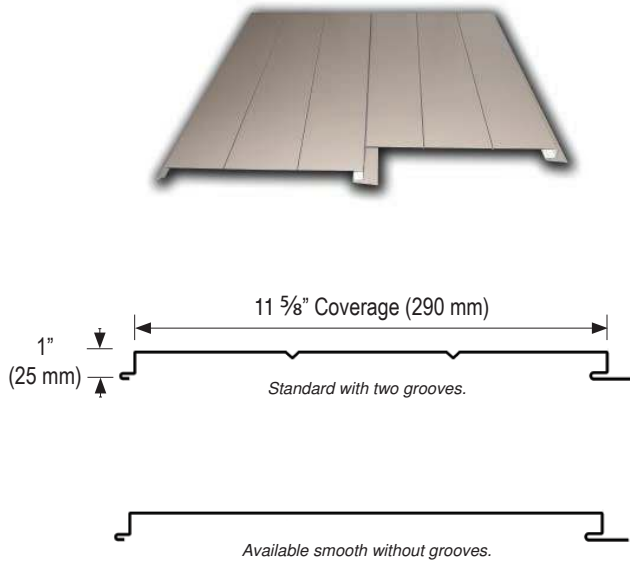

## COIL & COVERAGE

**Coil Size:** 15-7/8" (Nominal 16")

**Coil Quantity:** 138 SF per SQ of coverage

## SALE & LEASING INFORMATION

**Sale Price:** Consult BMC

**Non-Licensee Lease:** Consult BMC

**Licensee Lease:** Consult BMC

**Long Term Lease:** Consult BMC

## SPECIFICATIONS

Mounted on heavy duty 4-wheel table

**Width:** 35" **Length:** 176" **Height:** 56"

**Weight:** 3240 lbs with shipping cover (electric drive)  
3650 lbs with shipping cover (hydraulic drive)

1. 2 HP electric motor - 220V single-phase current or Hydraulic Drive System - requires both 110V & 220V single-phase current supply.
2. High Speed - 48' per minute
3. Built-in uncoiler (up to 2000 lb coil)
4. Stainless steel, heat-treated, hardened rollers
5. Unique side production for ease of operation
6. Mechanical slitter shear
7. Accurate-length gauge
8. Continuous-length panels, based on coil size
9. All sealed bearings
10. Coil handling apparatus included

## NET FREE VENTING AREA

Vented Vee-Panels provide 5.35 square inches of Net Free Vent Area (NFVA) per square foot of panel (5.19 square inches per linear foot). Berridge Manufacturing Company does not recommend this product in applications subject to aggressive atmospheres, marine environments or high humidity due to the corrosive nature of these environments on raw edges of steel.

