


L-Panel Roll Former

BERRIDGE FP-16

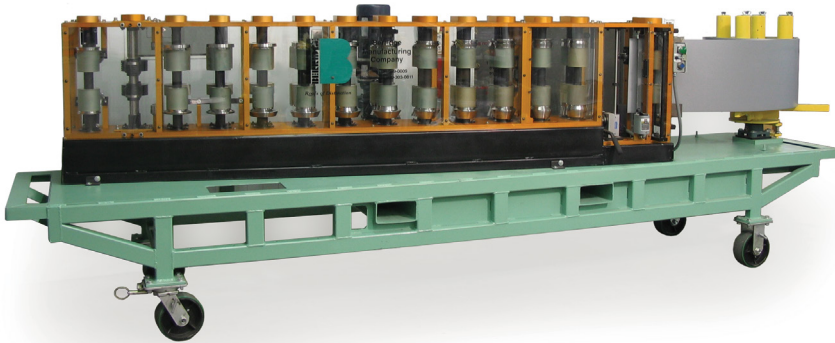

MATERIAL

24 GA and limited availability 22 GA Galvalume®
0.032 Aluminum, limited availability

COIL & COVERAGE

Coil Size: Nominal 16" (15 7/8")
Coil Quantity: 137.63 SF per square of coverage

NET FREE VENTING AREA

Vented L-Panels provide 5.19 square inches of Net Free Vent Area (NFVA) per linear foot of panel. Berridge Manufacturing Company does not recommend this product for applications subject to aggressive atmospheres, marine environments or high humidity due to the corrosive nature of these environments on raw edges of steel.

SPECIFICATIONS

Mounted on heavy duty 4-wheel table
Width: 35" **Length:** 176" **Height:** 56"
Weight: 3,240 lbs with shipping cover

- 2 HP electric motor - 220 V single-phase current
- High Speed - 45' per minute
- Built-in uncoiler (up to 2,000 lb coil)
- Stainless steel heat-treated, hardened rollers
- Unique side production for ease of operation
- Mechanical slitter shear
- Accurate-length gauge (Computer Optional)
- Continuous-length panels, based on coil size
- All sealed bearings
- Coil handling apparatus included

Pictured Right

Project: Lexus of Lakeway
Architect: Castles Design Group, Inc.
General Contractor: Chasco Constructors
Installing Contractor: Petersen Dean, Inc.
Color: Shasta White

The Berridge Model FP-16 Portable Roll Former forms the Berridge L-Panel. This panel may be used for fascia, soffit and ceilings. The L-Panel standard configuration is with 2 grooves however it is also available smooth with no grooves, or with two rows of venting.

