


Berridge High Seam Tee-Panel Load Chart

SOLID SHEATHING

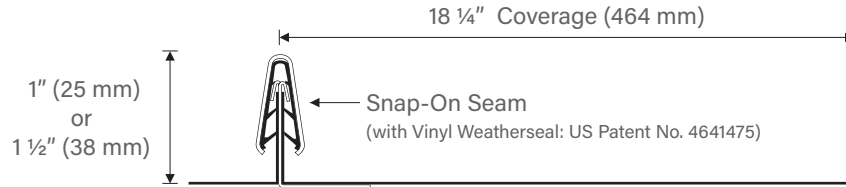

High Seam Tee-Panel (Galvalume Substrate)							
Gauge of Panel	Sheathing Option	Spacing (in)	Clip Type	Fastener	Fastener Quantity	Allowable (psf)	Ultimate (psf)
24	1/2" Plywood	24	Tee-Clip	#10	1	52.5	105
24	22 ga. Steel Deck	24	Tee-Clip	#10	1	52.5	105

NOTES:

- 1) Fasteners for **Wood Deck** to be Pancake Head with #2 Phillips head or Hex-Head Wood Screw
- 2) Fasteners for **Steel Deck** to be Pancake Head with #2 Phillips head or Hex-Head Self-Drilling, Self-Tapping Screw



CORPORATE HEADQUARTERS

2610 Harry Wurzbach Road
San Antonio, TX 78209
(800) 669-0009
www.Berridge.com

All information subject to change without notice. See website for details, specifications and Watertightness Warranty requirements.

© Berridge Manufacturing Company 2018 • 800-669-0009 • www.berridge.com