
Berridge HR-4 & HR-16 Panel

WALL AND FASCIA PANEL SYSTEM





The Berridge HR-4 Accent Wall Panel and the HR-16 Metal Wall panels are versatile and maintenance-free panels that can be installed horizontally or vertically. Both panels interlock with the HC-16, BR-12, HS-8, HS-12, and Reveal Series panel profiles.

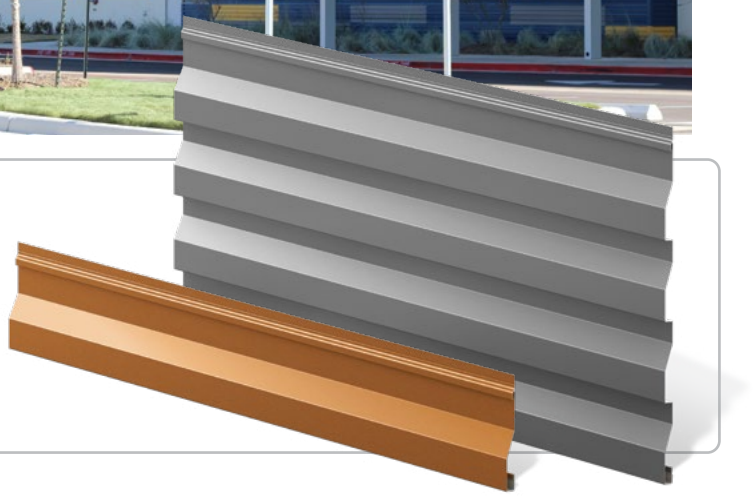

Materials

24 and 22 Gauge Steel
0.032 Aluminum


Specifications

Uses: Wall, Fascia, Screen Wall, Berridge Fencing System
Coverage: HR-4: 4″; HR-16: 16″
Finishes: Smooth
Fasteners: Concealed
Applications: Vertical on fencing; horizontal or vertical over open framing or solid sheathing
Pattern: ⅞" height and 4" rib with 2" reveal


Installation

- Panel is available from the factory in continuous lengths to a maximum of 40′.
- Interlocks with HC-16, BR-12, HS-8, HS-12, and the Reveal Series panel profiles.
- Use siding starter strip to start panel at bottom of soffit or sill.
- Use channel closure at inside and outside corners with or without rubber closures.
- Use standard channel at jambs with rubber closures.
- Use special channel at jambs without rubber closures.
- Use HR-16 rubber closures to prevent air infiltration.


HR-4 Accent Wall Panel
4″ Coverage (102 mm)



HR-16 Wall Panel
16″ Coverage (406 mm)

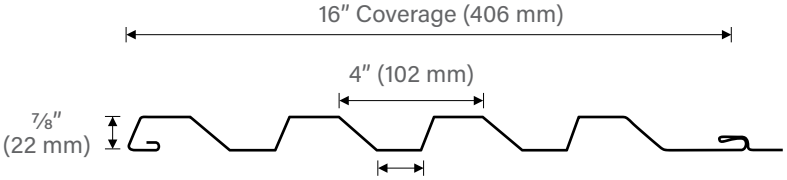

Pictured Above
Project: Compass Rose Manor (Phase 1) - Manor, TX
General Contractor: Bartlett Cocke General Contractors, LLC
Installing Contractor: Texas Roofing Co.
Color: Royal Blue, Zinc Grey, Mustard



Detail of HR Panel Interlock

All information subject to change without notice. See website for details, specifications and Watertightness Warranty requirements.
© Berridge Manufacturing Company 2026 ▪ (800) 669-0009 ▪ www.Berridge.com

BERRIDGE HR-4 & HR-16 PANEL TESTING AND CERTIFICATION SUMMARY CHART

CATEGORY		CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
PERFORMANCE	❑	Uplift Resistance	ASTM E-1592*	Test method to determine uplift resistance of open framing systems	See Load Chart on Berridge website
AIR AND MOISTURE	❑	Water Penetration	ASTM E-331	Test method for water penetration of metal roofs by uniform static air pressure difference	No Leakage at 15.0 PSF Pressure Differential
	❑	Air Leakage	ASTM E-283	Test method for rate of air leakage through exterior metal roofs	Less than 0.01 CFM at 6.24 PSF Pressure Differential
PRODUCT LISTINGS	❑	Florida Product Approval*	TAS 125	Local and state approval of products and systems for compliance with the structural requirements of the Florida Building Code	FL #17437.2 (24 GA or 0.032 AL - Steel Girts) FL #14082.2 HVHZ (24 GA - Steel Girts)
	■	Miami Dade*	TAS 202 TAS 201 TAS 203 ASTM E8	Miami Dade County approval of building products directly related to the structural wind resistance	NOA #23-0926.14 (24 GA - Steel Girts)
	❑	TDI Listed*	ASTM E-1592	Texas Department of Insurance Listing for wind capacities	EC-84 (24 or 22 GA - Steel Girts) EC-121 (0.032 AL - Steel Girts)
	❑	ICC-ES	ASTM E-1592	Capacity report by the International Code Council	ESR-4712 (24 or 22 GA - Steel Girts; 0.032 AL - Steel Grits)

■ - Steel only ❑ - Steel and Aluminum
For further details please visit www.Berridge.com
*** HR-16 approved only**

CORPORATE HEADQUARTERS
2610 Harry Wurzbach Road
San Antonio, TX 78209
(800) 669-0009
www.Berridge.com