


# Berridge HR-4 & HR-16 Panel

## WALL AND FASCIA PANEL SYSTEM



The Berridge HR-4 Accent Wall Panel and the HR-16 Metal Wall panels are versatile and maintenance-free panels that can be installed horizontally or vertically. Both panels interlock with the HC-16, BR-12, HS-8, and HS-12 panel profiles.

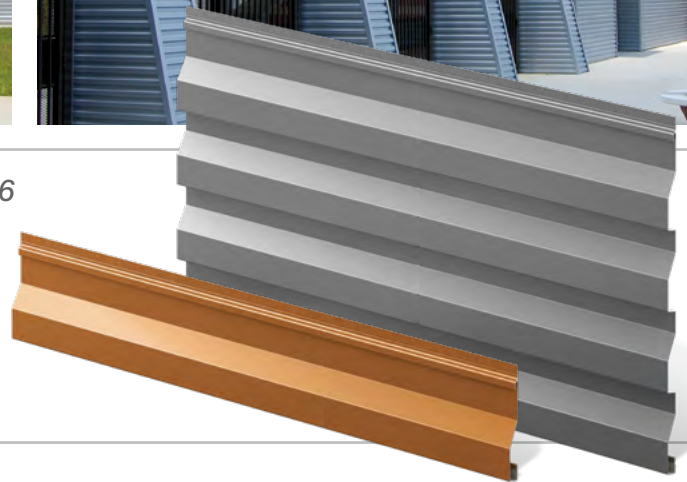

### Materials

24 and 22 Gauge Steel  
0.032 Aluminum

### Specifications

Uses: Wall, Fascia, Screen Wall, Berridge Fencing System  
Coverage: HR-4: 4"; HR-16: 16"  
Finishes: Smooth  
Fasteners: Concealed  
Applications: Vertical on fencing; horizontal or vertical over open framing or solid sheathing  
Pattern:  $\frac{7}{8}$ " height and 4" rib with 2" reveal

### Installation

- Panel is available from the factory in continuous lengths to a maximum of 40'
- Interlocks with HC-16, BR-12, HS-8, and HS-12 Panels
- Use siding starter strip to start panel at bottom of soffit or sill
- Use channel closure at inside and outside corners with or without rubber closures
- Use standard channel at jambs without rubber closures
- Use special channel at jambs without rubber closures
- Use HR rubber closures against air infiltration


#### HR-4 Accent Wall Panel

4" Coverage (102 mm)




#### HR-16 Wall Panel

16" Coverage (406 mm)

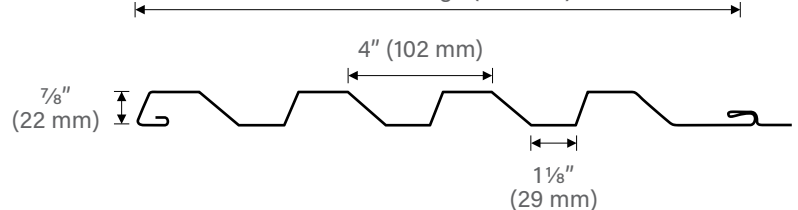

*Pictured Above*

Project: Strawberry Crest High School  
Installing Contractor: Ramcon  
Color: Zinc-Cote™



Detail of HR Panel Interlock

## BERRIDGE HR-4 & HR-16 PANEL TESTING AND CERTIFICATION SUMMARY CHART

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
PERFORMANCE	<input type="checkbox"/> Uplift Resistance	ASTM E-1592	Test method to determine uplift resistance of open framing systems	See Load Chart on Berridge website
AIR AND MOISTURE	<input type="checkbox"/> Water Penetration	ASTM E-331**	Test method for water penetration of metal roofs by uniform static air pressure difference	No Leakage at 15.0 PSF Pressure Differential
	<input type="checkbox"/> Air Leakage	ASTM E-283**	Test method for rate of air leakage through exterior metal roofs	Less than 0.1 CFM at 6.24 PSF Pressure Differential
ROOF LISTINGS	<input type="checkbox"/> Florida Product Approval*	TAS 125	Local and state approval of products and systems for compliance with the structural requirements of the Florida Building Code	FL #174372 (24 GA or 0.032 AL - Steel Girts)
	<input checked="" type="checkbox"/> Miami Dade*	TAS 202 TAS 201 TAS 203 ASTM E8	Miami Dade County approval of building products directly related to the structural wind resistance	NOA #20-0128.05 (Steel Girts)
	<input checked="" type="checkbox"/> TDI Listed*	ASTM E-1592	Texas Department of Insurance Listing for wind capacities	EC-84 (24 or 22 GA - Steel Girts)

■ - Steel only    □ - Steel and Aluminum

For further details please visit [www.berridge.com](http://www.berridge.com)

\* HR-16 approved only

\*\* See HR-16 Panel for test results on ASTM E-331 and ASTM E-283 with similar panel seams



**CORPORATE HEADQUARTERS**  
 2610 Harry Wurzbach Road  
 San Antonio, TX 78209  
 (800) 669-0009  
[www.Berridge.com](http://www.Berridge.com)