Berridge L-Panel

SOFFIT, CEILING, AND FASCIA PANEL SYSTEM



The Berridge L-Panel is a versatile and maintenancefree panel for use on soffit, ceilings, or fascia. The smooth, stucco embossed, and vented options allow this panel to be used throughout a project for many different applications.



Materials

24 and 22 Gauge Steel 0.032 Aluminum

Specifications

Uses: Soffit, Ceiling, Fascia, Screen Wall

Coverage: 11 5/8"

Finishes: Smooth, optional stucco emboss


Fasteners: Concealed

Applications: Vertical over open framing or solid sheathing

Pattern: Optional vee-grooves and venting

Installation

- Panel is available from the factory in continuous lengths to a maximum of 40'
- May be site-formed using the Berridge FP-16 Roll Former
- Vented option provides 5.19 square inches of Net Free
 Vent Area (NFVA) per linear foot of panel. (BMC does
 not recommend vented products in applications subject
 to aggressive atmospheres, marine environments or high
 humidity due to the corrosive nature of these environments
 on raw edges of steel.)
- 0.032 Aluminum is factory formed only

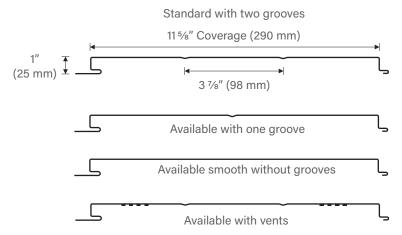

Pictured Above

Project: Central Park Urban Living

General Contractor: Palace Construction Co., Inc. Installing Contractor: Bighorn Metalworks, Inc.

Color: COR-TEN AZP® Raw

BERRIDGE L-PANEL TESTING AND CERTIFICATION SUMMARY CHART

CATEGORY		CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
PERFORMANCE	-	Uplift Resistance	ASTM E-1592	Test method to determine uplift resistance of open framing systems	See Load Chart on Berridge website
ROOF LISTINGS	•	Miami Dade	TAS 202 TAS 201 TAS 203 ASTM E8	Miami Dade County approval of building products directly related to the structural wind resistance	NOA #20-1013.11 (24 GA - Girts)
	•	TDI Listed	ASTM E-1592	Texas Department of Insurance Listing for wind capacities	EC-88 (24 GA - Girts)

■ - Steel only □ - Steel and Aluminum
For further details please visit www.berridge.com