

# Berridge L-Panel

## SOFFIT, CEILING, AND FASCIA PANEL SYSTEM



The Berridge L-Panel is a versatile and maintenance free panel for use on soffit, ceilings or fascia. The prefinished panels can be used over open framing or solid sheathing. The smooth, stucco embossed and vented options allow this panel to be used throughout a project for many different applications.

### Materials

24 and 22 Gauge Steel  
0.032 Aluminum

### Specifications

Uses: Soffit, Ceiling, Fascia, Screen Wall

Coverage: 11 5/8"

Finishes: Smooth, optional stucco emboss


Fasteners: Concealed

Applications: Vertical over open framing or solid sheathing

Pattern: Optional vee-grooves and venting

### Installation

- Panel is available from the factory in continuous lengths to a maximum of 40'
- May be site-formed using the Berridge FP-16 Roll Former
- Vented option provides 5.19 square inches of Net Free Vent Area (NFVA) per linear foot of panel. (BMC does not recommend vented products in applications subject to aggressive atmospheres, marine environments or high humidity due to the corrosive nature of these environments on raw edges of steel.)
- 0.032 Aluminum is factory formed only

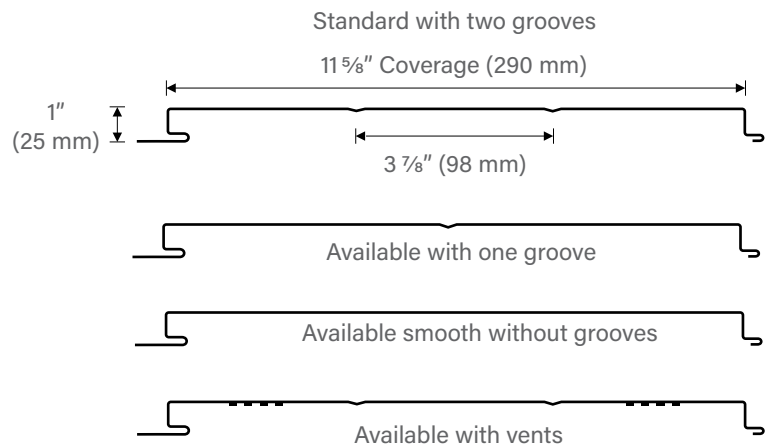

*Pictured Above*  
Project: Lexus of Lakeway  
Architect: Castles Design Group, Inc.  
General Contractor: Chasco Constructors  
Installing Contractor: Petersen Dean, Inc.  
Color: Shasta White

## BERRIDGE L-PANEL TESTING AND CERTIFICATION SUMMARY CHART

| CATEGORY      | CHARACTERISTIC      | TEST METHOD                              | PURPOSE  | RESULT                             |
|---------------|---------------------|--|--|------------------------------------|
| PERFORMANCE   | ■ Uplift Resistance | ASTM E-1592                              | Test method to determine uplift resistance of open framing systems                                 | See Load Chart on Berridge website |
| ROOF LISTINGS | ■ Miami Dade        | TAS 202<br>TAS 201<br>TAS 203<br>ASTM E8 | Miami Dade County approval of building products directly related to the structural wind resistance | NOA #15-0421.12 (Girts)            |
|               | ■ TDI Listed        | ASTM E-1592                              | Texas Department of Insurance Listing for wind capacities  | EC-88 (Girts)                      |

■ - Steel only    □ - Steel and Aluminum  
 For further details please visit [www.berridge.com](http://www.berridge.com)



**CORPORATE HEADQUARTERS**  
 2610 Harry Wurzbach Road  
 San Antonio, TX 78209  
 (800) 669-0009  
[www.Berridge.com](http://www.Berridge.com)