


Berridge L-Panel Load Chart

OPEN FRAMING

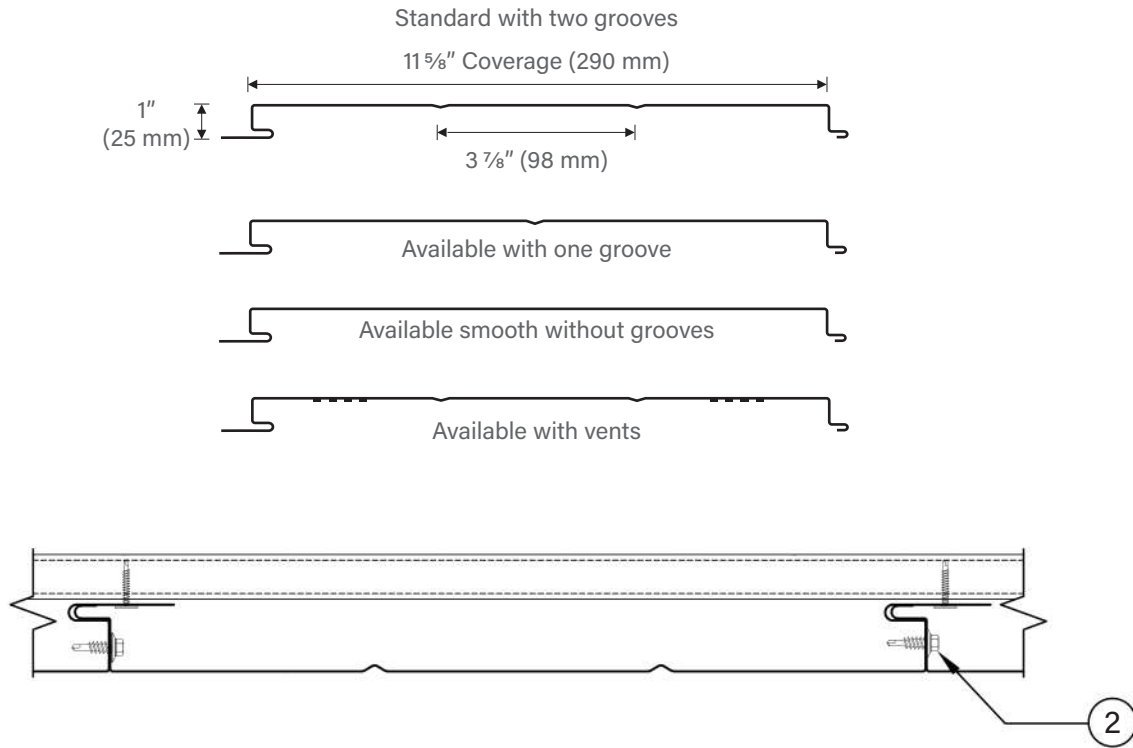

Open Framing on 16 ga Steel Support (Galvalume Substrate)					
Gauge of Panel	Spacing (in)	Fastener	Fastener Quantity	Allowable (psf)	Ultimate (psf)
24	24	#10-16 Pancake	2	47.50	95
24	30	#10-16 Pancake	2	45	90
24	36	#10-16 Pancake	2	42.50	85
24	42	#10-16 Pancake	2	40	80
24	48	#10-16 Pancake	2	37.50	75
24	54	#10-16 Pancake	2	35	70
24	60	#10-16 Pancake	2	32.50	65

NOTES:

- 1) All test results determined through ASTM E1592 testing standards.
- 2) Results reflected above utilize (1) 1/4-14X 7/8" laptek stitch fastener @ 24" on center.



CORPORATE HEADQUARTERS
 2610 Harry Wurzbach Road
 San Antonio, TX 78209
 (800) 669-0009
 www.Berridge.com