


Berridge Reveal Series Panels

WALL, SOFFIT, CEILING, AND FASCIA PANEL SYSTEM



The Berridge Reveal Series Panels are concealed fastener metal wall panels designed for horizontal and vertical wall applications.

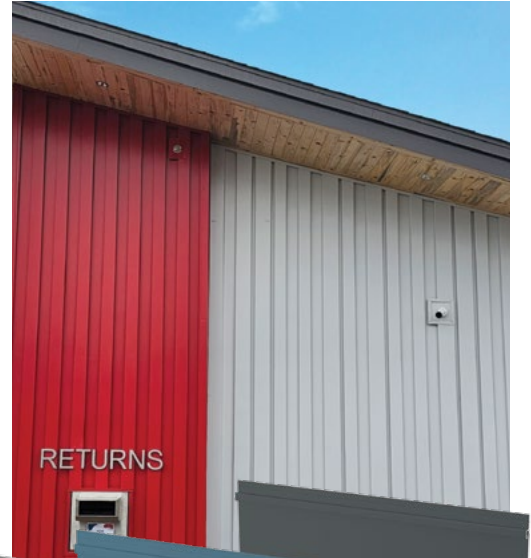

Materials

24 and 22 Gauge Steel
0.032 and 0.040 Aluminum

Specifications

Uses: Wall, Soffit, Ceiling, Fascia, Screen Wall, Berridge Fencing System

Coverage: RS-725: 7 1/4"; RS-9: 8 7/8"; RS-11-5: 10 7/8"; RS-11: 10 7/8"; RS-145: 14 1/2"

Finishes: Smooth

Fasteners: Concealed






Applications: Vertical on fencing; horizontal or vertical over open framing or solid sheathing

Installation

- Panel is available from the factory in continuous lengths to a maximum of 40'
- Interlocks with BR-12, HC-16, HR-4, HR-16, HS-8 and HS-12 panels
- Use siding starter strip to start panel at bottom of soffit or sill
- Use channel closure at inside and outside corners
- Use standard channel at jambs
- Use special channel at jambs



Detail of RS-725 Panel Interlock

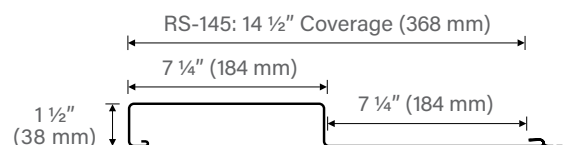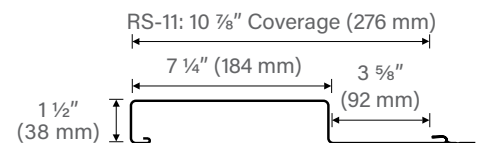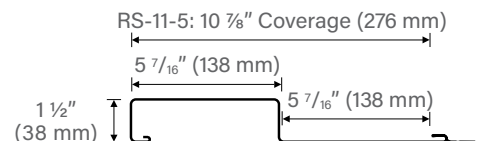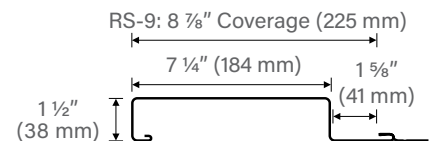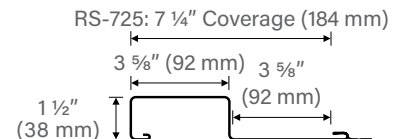

Pictured Above

Project: Clearview Library - Severance, CO

General Contractor: Fransen Pittman

Installing Contractor: Advanced Roofing Technologies, LTD

Color: Shasta White, Deep Red

All information subject to change without notice. See website for details, specifications, and Watertightness Warranty requirements.

© Berridge Manufacturing Company 2026 • (800) 669-0009 • www.Berridge.com

BERRIDGE REVEAL SERIES PANEL TESTING AND CERTIFICATION SUMMARY CHART

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
PERFORMANCE	<input type="checkbox"/> Uplift Resistance	ASTM E-1592	Test method to determine uplift resistance of open framing systems	See Load Chart on Berridge website
AIR AND MOISTURE	<input type="checkbox"/> Water Penetration	ASTM E-331**	Test method for water penetration of metal roofs by uniform static air pressure difference	No Leakage at 15.0 PSF Pressure Differential
	<input type="checkbox"/> Air Leakage	ASTM E-283**	Test method for rate of air leakage through exterior metal roofs	Less than 0.01 CFM at 6.24 PSF Pressure Differential
PRODUCT LISTINGS	<input type="checkbox"/> Florida Product Approval	TAS 125	Local and state approval of products and systems for compliance with the structural requirements of the Florida Building Code	FL# 418171 R1 (24 GA - Steel Girts)

■ - Steel only □ - Steel and Aluminum

For further details please visit www.Berridge.com

** See HR-16 Panel for test results on ASTM E-331 and ASTM E-283 with similar panel seams



CORPORATE HEADQUARTERS
 2610 Harry Wurzbach Road
 San Antonio, TX 78209
 (800) 669-0009
www.Berridge.com