

Thin Line Panel Roll Former

BERRIDGE TL-6



The Berridge Model TL-6 Portable Roll Former forms the Berridge Thin Line Panel in continuous lengths with a 3 5/8" exposure and a 3/8" profile height. The Thin Line Panel is used for walls, ceilings, soffits and fascia applications. Panels are standard with smooth finish or stucco or woodgrain embossed.

MATERIAL

24 GA Galvalume®

COIL & COVERAGE

Coil Size: Nominal 5 3/4" (Actual Size)

Coil Quantity: 165.52 SF of coil per square of coverage


SPECIFICATIONS

Mounted on heavy duty 4-wheel table

Width: 34" **Length:** 146" **Height:** 42"

Weight: 2,430 lbs with shipping cover

- 2 HP electric motor - 220V single-phase current
- High Speed - 45' per minute
- Built-in uncoiler (up to 900 lb coil)
- Stainless steel heat-treated, hardened rollers
- Mechanical slitter shear
- Batch control computer
- Continuous-length panels, based on coil size
- All sealed bearings
- Coil handling apparatus included
- Swivel shear for bevel cut panels

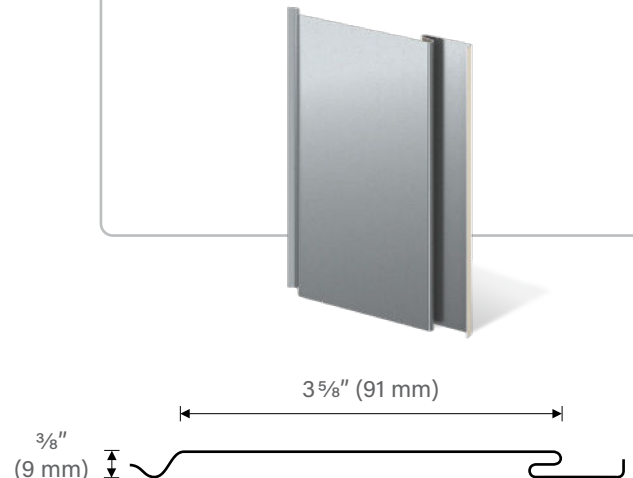

Pictured Right

Project: Sarah's Circle

Architect: Perkins + Will

General Contractor: Summit Design & Build

Installing Contractor: Metalmaster Roofmaster

Colors: Parchment, Zinc Grey, & Charcoal Grey

