


The Berridge Model ZC-21 Portable Roll Former curves Berridge Zee-Lock Panels to a minimum convex radius of 20'. The ZC-21 also has the capability of curving both 2" and 3" Zee-Ribs. The ZC-21 may be used separately or in tandem with the SP-21X Berridge Zee-Lock Roll Former. As shown above, Berridge provides a connection kit for using the ZC-21 Curver in tandem with the SP-21X to insure correct panel alignment. This unique machine enables the roofing contractor to curve long-length Berridge Zee-Lock Panels at the job site to fit radius curved roofs perfectly. Berridge will factory set the curver for the radius of the project. For projects requiring multiple radii, the curver must be returned to Seguin, TX. Consult BMC Leasing for training on ZC-21 Curver radius setup.



Single-Lock Seam (90°)
w/ Vinyl Weatherseal

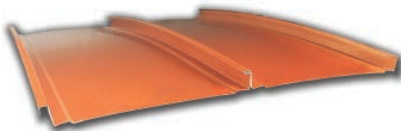


PANEL COVERAGE

Panel Size: 16" W x 2" H (Mechanical Seam)

SYSTEM ACCESSORIES (Factory Formed)

Continuous Zee-Rib: ZC-21 Curves 2" & 3" Zee-Rib

MINIMUM CURVING RADIUS



Convex: 20'

SEAM OPTIONS

Seam Options: Single Lock 90° Seam with Vinyl Weatherseal. Consult BMC on Curved, Double-Lock Zee-Lock availability.



Single-Lock Seamer

SALE & LEASING INFORMATION

Sale Price: Consult BMC

Lease: Consult BMC

Long Term Lease: Consult BMC

SPECIFICATIONS

Mounted on heavy duty 4-wheel table
Width: 34" Length: 89" Height: 67"
Weight: 1860 lbs with shipping cover

1. 2 HP electric motor - 110V single-phase current
2. High Speed - 45' per minute
3. Stainless steel heat-treated, hardened rollers
4. Unique side production for ease of operation
5. Ability to curve continuous-length panels
6. All sealed bearings
7. Curves panels and continuous Zee-Rib
8. Operates stand-alone or in tandem with SP-21X