


Berridge Continuous Tee-Lock Rib

FOR USE WITH TEE-LOCK PANEL

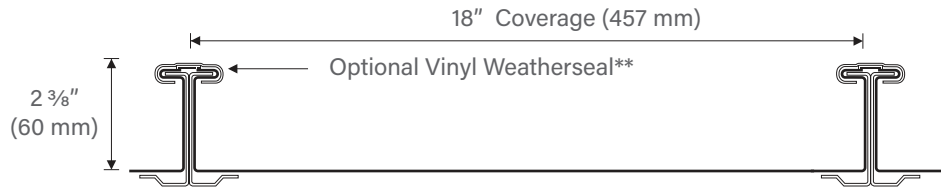

Materials

22 Gauge Steel


Installation

- Install per Berridge Installation Details
- Attachment: Use (2) #12-14 fenderhead T-3 self-drilling fastener per rib to steel supports
- Spacing: 60" o.c. maximum to 16 GA steel supports
- Typically sold in 10' and 20' lengths
- Not for use with Aluminum
- For use in open framing conditions where increased capacity is required only*

Note:

*If specifications, local codes, or other regulations dictate specific wind uplift requirements, consult Berridge's Engineering Department at (800) 669-0009. It may be necessary to use a different clip, clip spacing, fastener, fastener spacing, or assembly.

** Vinyl weatherseal in Tee-Lock seam cap is required for watertightness warranties and open framing conditions.

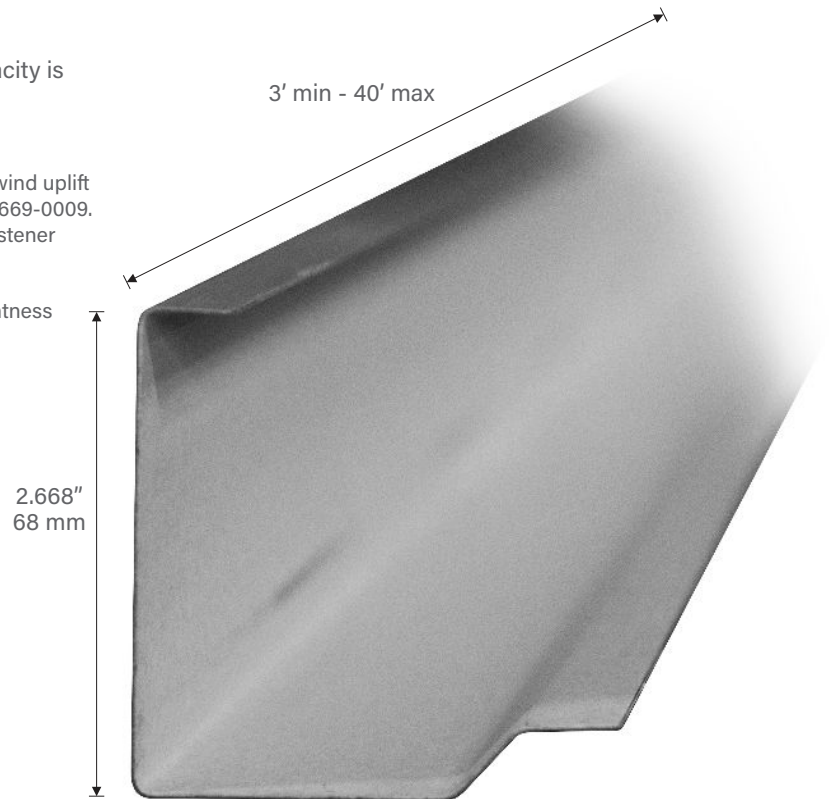

CORPORATE HEADQUARTERS

2610 Harry Wurzbach Road
San Antonio, TX 78209
(800) 669-0009
www.Berridge.com